


SPECIFICATION CONTROL DRAWING

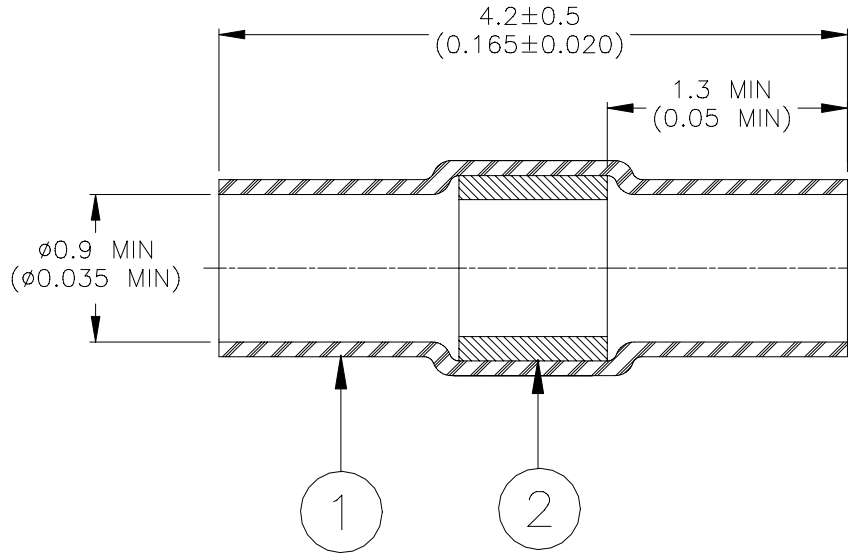

MATERIALS

1. **INSULATION SLEEVE:** Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. **SOLDER PREFORM WITH FLUX:**
SOLDER: TYPE Sn96 per ANSI J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.

APPLICATION

1. This part is designed to attach two leads having a combined diameter between 0.58 and 0.89 (0.023 and 0.035).
2. Part may be installed using Raychem approved heaters.

@ 2006 Tyco Electronics Corporation. All rights reserved.

tyco <i>Electronics</i>		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		<i>Raychem</i>		TITLE: SOLDERSLEEVE DEVICE	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]					DOCUMENT NO.: D-210-0213		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			
DRAWN BY: P.TALLY		CAGE CODE: 06090		REPLACES: N/A		DCR NUMBER: D060359	
SCALE: NTS			REV.: A		DATE: 7-Nov-06		SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.