


KEMET Part Number: CKR05BX473KR
(C052T473K5X5CR, M39014/01-1547)

LDD Mil X7R PRF39014, Ceramic, Military/High Reliability, 0.047 uF, 10%, 50 VDC, BX, R (0.01%/1000 Hrs), Lead Spacing = 5.08mm

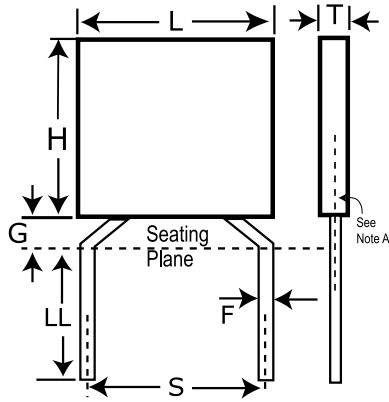

General Information	
Supplier:	KEMET
Series:	LDD Mil X7R PRF39014
Style:	Radial
RoHS:	No
Termination:	Lead (SnPb)
Failure Rate:	R (0.01%/1000 Hrs)
Testing and Reliability:	MIL-PRF-39014
Qualifications:	MIL-PRF-39014
Notes:	Lead Length Shown Is For Parts Supplied In Bulk, See Packaging Specifications For Lead Lengths When Not Provided In Bulk

Dimensions	
L	4.83mm +/-0.25mm
H	4.83mm +/-0.25mm
T	2.29mm +/-0.25mm
S	5.08mm +/-0.38mm
LL	31.75mm MIN
F	0.635mm +0.102/-0.051mm
G	1.143mm MAX
K	4.826mm +/-0.254mm

Specifications	
Capacitance:	0.047 uF
Capacitance Tolerance:	10%
Voltage DC:	50 VDC
Dielectric Withstanding Voltage:	125 V
Temperature Range:	-55/+125C
Temperature Coefficient:	BX
Dissipation Factor:	2.5%
Insulation Resistance:	21.3 GOhms

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	100