


# 75 Ohm Type N Jack to Mini-75 Ohm SMB Jack




INCHES (MILLIMETERS)  
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST



|                                   |
|-----------------------------------|
| <b>STAINLESS STEEL PASSIVATED</b> |
| 134-1069-031                      |

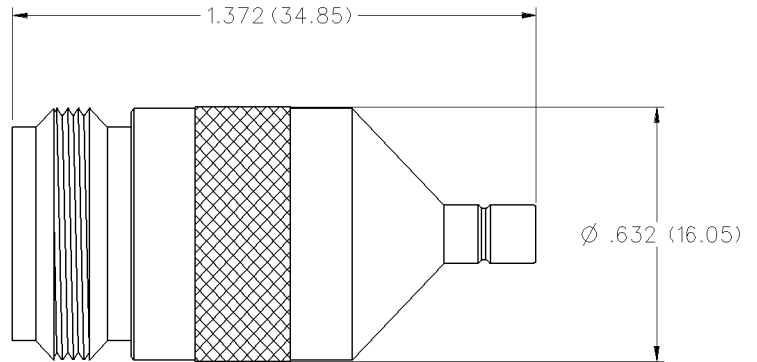

## MATING ENGAGEMENT FOR 75 OHM "N" SERIES BASED ON MIL-STD-348A "N" SERIES

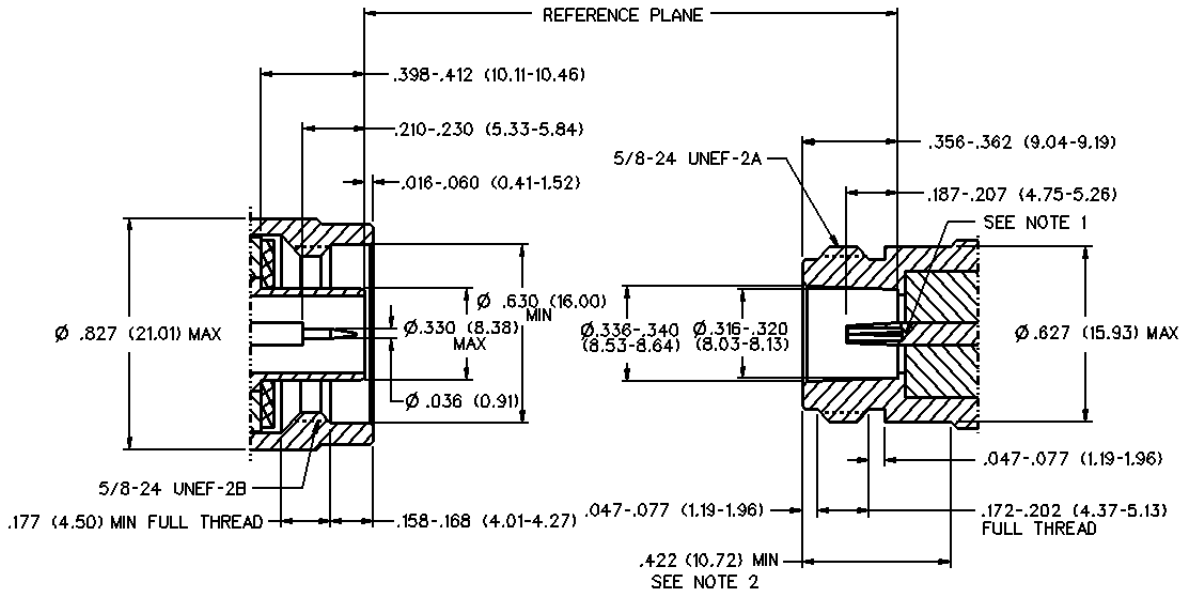

- NOTES:
1. ID of contact to meet VSWR, mating characteristics and connector durability when mated with a dia .036/.037 (0.91/0.94) male contact.
  2. Clearance for mating connector coupling nut.

# Mini-75 Ohm SMB Connectors



## Specifications

INCHES (MILLIMETERS)  
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

### ELECTRICAL RATINGS

**Impedance:** 75 ohms

**Frequency Range:** 0-2 GHz

**VSWR:** f = GHz

RG-179, RG-59, Belden 735A cable:

|   |             |
|---|-------------|
| Straight cabled connectors .....          | 1.25 + .04f |
| Right angle cabled connectors .....       | 1.35 + .04f |
| Adapters .....                            | 1.20 + .04f |
| Type N Adapters .....                     | 1.05 + .01f |
| Matching pad 50 ohm/75 ohm .....          | 1.05 + .1f  |
| Loads .....                               | 1.05 + .01f |
| Uncabled receptacles, opens, shorts ..... | N/A         |

**Working Voltage:** (Vrms maximum)†

| Connectors for Cable Type   | Sea Level | 70K Feet |
|---|-----------|----------|
| RG-179, RG-59, Belden 735A,<br>uncabled receptacles, adapters ..... | 335       | 85       |
| Open, shorts, loads, matching pad .....                             | N/A       | N/A      |

**Dielectric Withstanding Voltage:** (VRMS minimum at sea level)†

|  |      |
|--|------|
| Connectors for RG-179, RG-59, Belden 735A,<br>uncabled receptacles, adapters ..... | 1000 |
| Open, shorts, loads, matching pad .....  | N/A  |

**Corona Level:** (Volts minimum at 70,000 feet)†

|  |     |
|--|-----|
| Connectors for RG-179, RG-59, Belden 735A .....                    | 250 |
| Uncabled receptacles, adapters, open, shorts, loads, matching pad: | N/A |

**Electrical Length:** Open ± 1.5° (± 5.2° relative to short)

Short ± 1.5° (± 5.2° relative to open)

Adapters ± 5.2° (N/A for Jack-Bulkhead Jack and N Types)

**Insertion Loss:** (dB maximum, tested at 1.5 GHz)

|  |              |
|--|--------------|
| Straight cable connectors .....                            | 0.30 dB      |
| Right angle cable connectors .....                         | 0.60 dB      |
| Matching pad .....   | 6 dB nominal |
| Uncabled receptacles, adapters, opens, shorts, loads ..... | N/A          |

**Insulation Resistance:** 1000 megohms minimum

**Contact Resistance:** (milliohms maximum)

|  | Initial | After Environmental |
|--|---------|---------------------|
| Center contact (straight cabled connectors,<br>uncabled receptacles, opens, shorts, loads) ..... | 6.0     | 8.0                 |
| Center contact (right angle cabled<br>connectors and adapters) .....                             | 12.0    | 16.0                |
| Outer contact (gold plated connectors) .....   | 1.0     | 1.5                 |
| Outer contact (nickel plated connectors) .....   | 2.5     | 3.5                 |
| Braid to body (gold plated connectors) .....   | 1.0     | N/A                 |
| Braid to body (nickel plated connectors) .....   | 2.5     | N/A                 |

**RF Leakage:** (dB minimum tested at 2.5 GHz)

|   |        |
|---|--------|
| Cable connectors .....  | -55 dB |
| Uncabled receptacles, adapters opens, shorts, loads, matching pad ..... | N/A    |

**RF High Potential Withstanding Voltage:** (Vrms minimum, tested at 4 and 7 MHz)†

|   |     |
|---|-----|
| Connectors for RG-179, RG-59, Belden 735A ..... | 700 |
| Uncabled receptacles and adapters .....         | 600 |
| Opens, shorts, loads, matching pad .....        | N/A |

**Power Rating:** (Loads and matching pad only) 1.0 watt at +25°C derated linearly to .5 watt at +125°C

### MECHANICAL RATINGS

**Engagement Design:** MIL-C-39012, Series SMB

**Engagement/Disengagement Force:** 2 pounds minimum to 14 pounds maximum axial force

**Contact Retention:** 4 lbs. minimum axial force (captivated contacts)

1 inch-ounce minimum torque (uncabled receptacles)

**Cable Retention:**

|  | Axial Force* | Torque  |
|--|--------------|---------|
|  | (pounds)     | (in-oz) |

|  |    |     |
|--|----|-----|
| Connectors for RG-179, Belden 735A ..... | 20 | N/A |
| Connectors for RG-59 .....               | 40 | N/A |

\* or cable breaking strength whichever is less.

**Durability:** 500 cycles minimum

### ENVIRONMENTAL RATINGS (Meets or exceed the applicable paragraph of MIL-C-39012)

**Temperature Range:** - 65°C to +165°C -- Connectors and adapters

- 65°C to +125°C -- Loads, matching pad

20°C to 26°C -- Opens, shorts

**Thermal Shock:** MIL-STD-202, Method 107, Condition B

(N/A opens, shorts, loads, matching pad)

**Corrosion:** MIL-STD-202, Method 101, Condition B

(N/A opens, shorts, loads, matching pad)

**Shock:** MIL-STD-210, Method 213, Condition B

(N/A opens, shorts, loads, matching pad)

**Vibration:** MIL-STD-202, Method 204, Condition B

(N/A opens, shorts, loads, matching pad)

**Temperature Coefficient:** (Loads only) ± 300 ppm/°C

### MATERIAL SPECIFICATIONS

**Bodies:** Brass per QQ-B-626, gold plated\*\* per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

N type adapters stainless steel per QQ-S-763, passivated per MIL-F-14072

**Contacts:** Male & Female - beryllium copper per QQ-C-530, gold plated per MIL-G-45204 .00003" min.

**Insulators:** PTFE fluorocarbon per ASTM D 1710 and ASTM D 1457

**Expansion Caps:** Brass per QQ-B-613, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Crimp Sleeves:** Copper per WW-T-799, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Mounting Hardware:** Brass (nuts) per QQ-B-626 or phosphor bronze (lockwashers) QQ-B-750, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

\*\* All gold plated parts include a .00005" min. nickel underplate barrier layer.

Avoid user injury due to misapplication. See safety advisory definitions inside front cover.

### MATING ENGAGEMENT FOR MINI-75 OHM SMB SERIES (INTERMATEABLE WITH STANDARD 50 OHM SMB)



#### NOTES:

1. ID of contact to meet VSWR, mating characteristics and connector durability when mated with a dia .019-.021 (0.48/0.53) male contact.
2. Must meet the force to engage and disengage when mated with mating part.