

## SUMMARY

### # Wires

Low	4
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	00
Termination type	Male solder
IP rating	50
Cable Ø	2.80 - 3.50 mm
Matching parts	EGG.00.304.CLL
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FG*: Straight plug, cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	D35: 2.8 - 3.5 mm
Variant	Z : Nut for fitting a bend relief

### Performance

Configuration	0.304 : 4 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	2 Amps

### Specifications

Contact Type:	Solder
Max. Matings:	5000
Contact Dia.:	0.5 mm (0.02in)
Bucket Dia.:	0.4 mm (0.016in)
Max. Solid Conductor:	0.09 mm <sup>2</sup> (AWG 28)
Max. Stranded Conductor:	0.05 mm <sup>2</sup> (AWG 30)


R (max): 8.7 mOhm  
 Vtest (contact-shell): 650 V (AC), 920 V (DC)  
 Vtest (contact-contact): 800 V (AC), 1130 V (DC)

## Others

IP Rating: 50

# DRAWINGS

## Draws

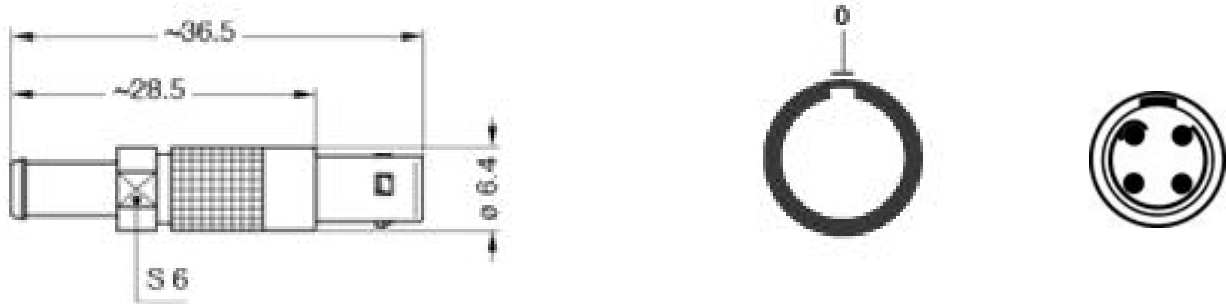

## Dimensions

	A	L	M	S1	S2
mm.	6.4	28.5	20.7	5.5	6
in.	0,25	1,12	0,81	0,22	0,24

# RECOMMENDED BY LEMO


## Tools

Caps: BFG.00.100.PCSG

## Cables

CMN.04.T28.031PGCE	PVC	GREY	
CMN.04.T28.031PGZE		Grey	
CMN.04.T28.031PNCE	PVC	Black	
CMN.04.T28.031PNZE			

Property of LEMO SA. All rights reserved  
 This document is not contractual

CMN.04.T28.031QGC 004 041	TPR PVC	Grey Grey	
004 050	PVC	Black	