

Zack Marker strip, flat - ZBF 16:UNPRINTED - 0827464

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snap into flat marker groove, for terminal block width: 16 mm, lettering field size: 16.25 x 10.5 mm

Why buy this product

- The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements

Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	 4 046356 431439
GTIN	4046356431439

Technical data

Dimensions

Width (a)	16 mm
-----------	-------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
---------------------------------	-------------------

General

Note	Can be labeled with CMS
	Can be labeled with CMS
Color	white
Type	flat
Components	free from silicone and halogen
Flammability rating according to UL 94	V2
Material	PA
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)

Zack Marker strip, flat - ZBF 16:UNPRINTED - 0827464

Technical data

General

Number of individual labels	50
Number of individual labels per row	5
Number of marker strips	10
Marking mounting type	snap into flat marker groove

Standards and Regulations


Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V2

Environmental Product Compliance

China RoHS	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
------------	---

Drawings

Schematic diagram

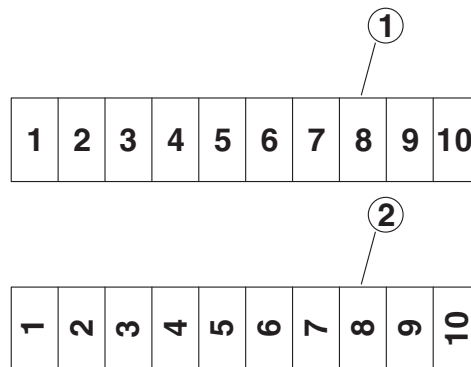

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>